




LōDril® DH10



DH10-15m in St. George, Utah with 610 mm auger

- ✓ QUICK SET UP
- ✓ HIGH PERFORMANCE
- ✓ VERSATILE
- ✓ LOW CLEARANCE
- ✓ EASY TO OPERATE
- ✓ LOW MAINTENANCE

SPECIFICATIONS:

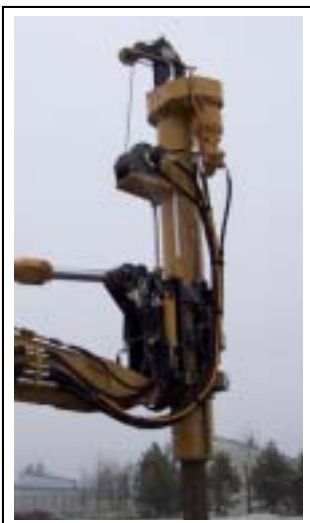

TORQUE/ SPEED	
Max. Torque	1.4 T-m
Drill speeds	30-60 rpm
Spin-off speed	100 rpm
HOLE DEPTH	9-15 meters
HOLE DIAMETER	1000 mm*
ATTACHMENT WEIGHT	1.8 T (approx.)**
ATTACHMENT HEIGHT	3-4.3 meters
KELLY WINCH	2.25 T (PullMaster PL5)
KELLY ROPE DIA. (max.)	11mm (7/16")
KELLY SWIVEL CAPACITY	3 tonne
KELLY INNER BAR	76mm
REQUIRED EXCAVATOR WEIGHT	12 tonne

*Depending on soil conditions

** Depending on drill depth