

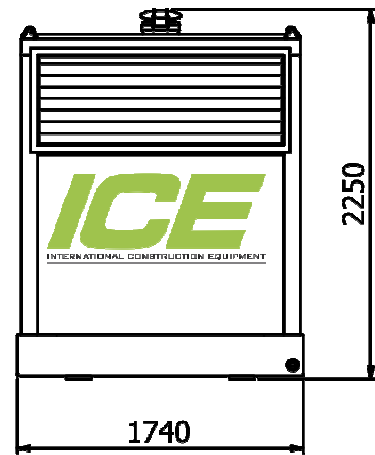


# SPEC SHEET

## ICE 700 Series Power Packs

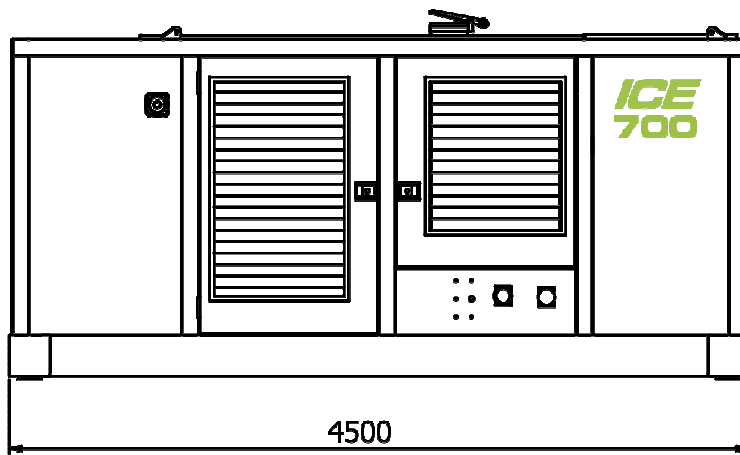

700 Series / 0608

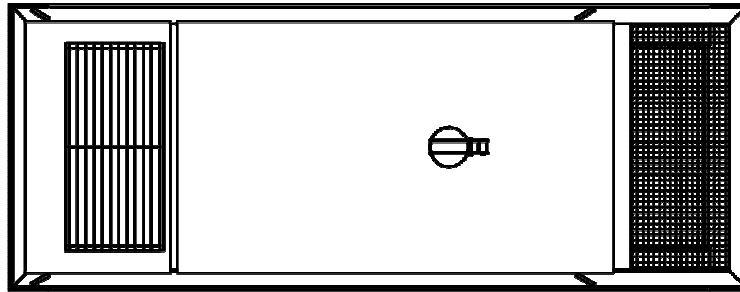

**Note: Dimensions and weight subject to change**

SEPCIFICATIONS	700RF0002	700RF0004	
Diesel engine	Caterpillar C18 TA ACERT	Volvo 1643VE	
Max. theoretical power	470/640	565/768	kW/HP (DIN)
Max. Frequency	2100	1800	rpm
Max. working pressure	350	350	bar
Hydraulic pumps	2x Parker PVplus180	2x Parker PVplus180	
Max. oil flow	755	755	L/min
Oil flow @ 350 bar	730	730	L/min
Diesel oil	750	750	L
Hydraulic oil	1200	1200	L
Weight (±)	9100	9100	kg

# SPEC SHEET

## ICE 700 Series Power Packs

# ICE

INTERNATIONAL CONSTRUCTION EQUIPMENT

TECHNISCHE DATEN	700RF0002	700RF0004	
Diesel Motor	Caterpillar C18 TA ACERT	Volvo 1643VE	
Max. theoretische Leistung	470/640	565/768	kW/PS (DIN)
Max. Drehzahl	2100	1800	UPM
Max. Betriebsdruck	350	350	bar
Hydraulische Pumpe	2x Parker PVplus180	2x Parker PVplus180	
Max. Fördermenge	755	755	L/min
Fördermenge bei 350 bar	730	730	L/min
Diesel Öl	750	750	L
Hydraulische Öl	1200	1200	L
Gewicht (±)	9100	9100	Kg

SPÉCIFICATIONS	700RF0002	700RF0004	
Moteur diesel	Caterpillar C18 TA ACERT	Volvo 1643VE	
Puissance théorique max.	470/640	565/768	kW/CV (DIN)
Max. Fréquence	2100	1800	rpm
Pression de travail max.	350	350	bar
Pompe hydraulique	2x Parker PVplus180	2x Parker PVplus180	
Débit d'huile max.	755	755	L/min
Débit d'huile à 350 bar	730	730	
Huile Diesel	750	750	L
Huile hydraulique	1200	1200	L
Poids (±)	9100	9100	kg

SPECIFICATIES	700RF0002	700RF0004	
Diesel motor	Caterpillar C18 TA ACERT	Volvo 1643VE	
Max. theoretische vermogen	470/640	565/768	kW/PK(DIN)
Max. toerental	2100	1800	rpm
Max. werkdruk	350	350	bar
Hydraulische pomp	2x Parker PVplus180	2x Parker PVplus180	
Max. olie doorstroming	755	755	L/min
Olie doorstroming bij 350 bar	730	730	
Diesel olie	750	750	L
Hydraulische olie	1200	1200	L
Gewicht (±)	9100	9100	kg